

DUROPARK



- With detector
- More light
- More efficient


A sealed LED striplight
for car-parks and public spaces.



Duropark LED




Duropark Access LED




Features:

- Sealed strip fixture for indoor and outdoor environments
- Duropark LED: injection-moulded polycarbonate grey body
- Duropark Access LED: reinforced polycarbonate grey body
- Opal polycarbonate diffuser
- Stainless steel vandal-resistant locking clips
- CCT 4000 K, CRI min. 80
- 3-year guarantee

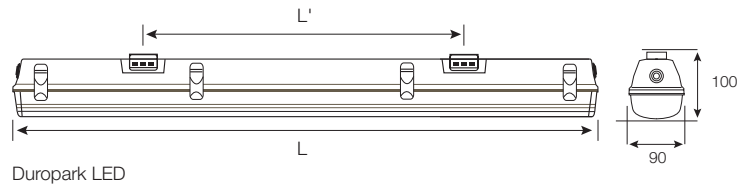


Duropark LED

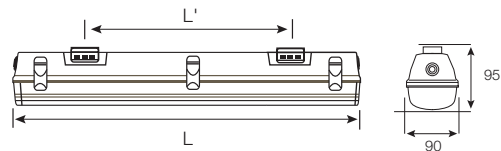

Duropark Access LED

Duropark - code: 7840 9400



DUROPARK LED ceiling installation only



220-240 V AC / 50/60 Hz RoHS

Length L (mm)	Mounting distance L' (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
1277	800	31	4400	142	7840 94 ..
1577	1100	37	5500	147	7841 94 ..

Lumen maintenance: L70B50 / 50,000 hours

Coding:

replace the two dashes (--) by the corresponding figures: e.g 7840 94 ..

- 00 no detection
- 10 with detection *
- 12 with Pro detection

DUROPARK ACCESS LED ceiling installation only



220-240 V AC / 50/60 Hz RoHS

Length L (mm)	Mounting distance L' (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
New 669	360	15	2000	133	7842 94 ..

Lumen maintenance: L70B50 / 50,000 hours

Coding:

replace the two dashes (--) by the corresponding figures: e.g 7842 94 ..

- 00 no detection
- 10 with detection *

* for stand-alone installation without daisy-chaining.

