



SMILE stainless

Stainless steel flush-mounting luminaire for way-marking in public spaces.



Features:

- Flush-mounting luminaire
- 316L stainless steel frame (thickness 4 mm)
- Tempered glass diffuser
- Aluminium flush-mounting sleeve
- CCT 4000 K, CRI min. 80
- Stainless steel crosspoint screws
- 3-year guarantee

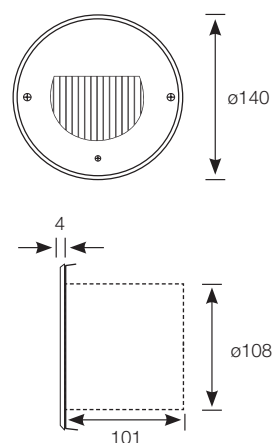

Flush-mounting dimensions:
101 mm x ø 108 mm

SMILE stainless LED

i direct 860

220-240 V AC / 50/60 Hz RoHS

Designation	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
Smile	8	140	17	8605 8400

Lumen maintenance: L70B50 / 50,000 hours