


ALEANE

Asymmetrical

Extra-low profile vandal-resistant
architectural luminaire for maintenance pits



BVCert. 6037554

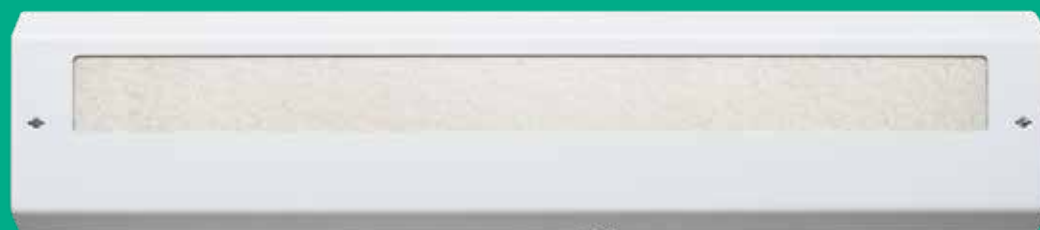





FEATURES:

- Extra-low profile vandal-resistant, rip-out and oil resistant architectural luminaire
- Base in 1 mm thick anticorrosion-treated steel with polyester powder-coated finish
- Cover in 1.5 mm thick anticorrosion-treated steel with polyester powder-coated finish
- 3 mm Duroflam® diffuser
- Sealing vent
- Side cable-entry glands
- CTT 4000 K, IRC min. 80
- Stainless steel vandal-resistant screws
- Fixing outside the sealed body
- Anti-graffiti RAL 9010 ○

OPTIONS AVAILABLE ON REQUEST:

- 3000 K LEDs
- Version with emergency pack
- Through wiring
- Class II

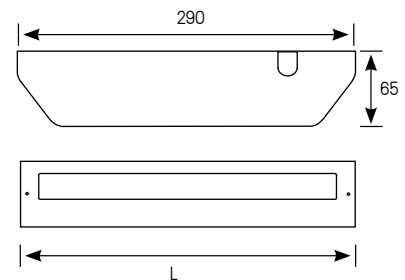

Length L (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	Code
1325	17	1300	76	6945 04--
1325	41	2900	71	6946 04--


Lumen maintenance: L80B10 / over 72,000 h
L90B50 / 52,000 h

Coding colour temperature 3000 K : example 4000K: 6945 04--
replace 4 with 3 3000K: 6945 03--

Coding: replace the two dashes (--) by the corresponding figures:

example 6945 04--

00 NO DETECTION
21 DALI DIMMABLE + SWITCH DIMMING

 Vandal-resistant tool (bit) to be ordered separately
code : 9800 0004

Additional options ALEANE

Codification:

add the corresponding suffix to the product code

example: 6915 0400 ----

9101 THROUGH WIRING
9413 FLAT DUROFLAM® DIFFUSER
9601 ANTI-GRAFFITI PROTECTION
9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)
9801 IN-LINE FITTING

DETAILS



