

TITAN

C95 / E /

A30 / A45

A comprehensive range
of steel luminaires designed for premises
and pedestrian subways
subject to extreme vandalism.



BVCert. 6037554










FEATURES:




- Luminaire withstands extreme vandalism
- Wall- (Titan C95) or 45° (Titan A45) or 30° (Titan A30) corner-mounted versions: body and frame in ZP steel
- Flush-mounting version (Titan E): body and frame in painted 304L stainless steel or all-stainless steel in brushed 316L stainless steel. Please enquire.
- CCT 4000 K, CRI min. 80
- Polyester powder-coated finish
- Braced Opalescent polycarbonate diffuser
- Stainless steel vandal-resistant screws
- Wall- and corner-mounting versions supplied c/w nickel-plated brass cable gland
- Flush-mounting version supplied c/w cable seal
- RAL 7016 ●

OPTIONS AVAILABLE ON REQUEST:

- 3000 K LEDs
- Version with emergency pack
- Standby LED
- Class II
- Trunking (junction panel between luminaires)
- Opalescent polycarbonate diffuser (IK11+ 80J)
- Color white : RAL 9003 ○

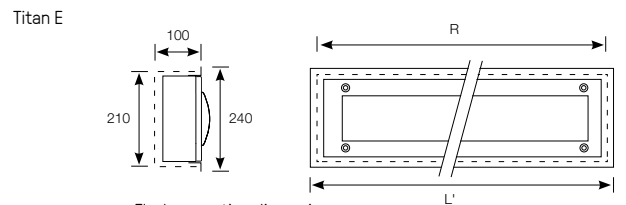

Flush-mounting dimensions:
R x 210 mm x 100 mm



| Length (mm) | Power (W) | Luminaire light output (lm) | Luminaire efficacy (lm / W) | Code |
|-------------|-----------|-----------------------------|-----------------------------|-----------|
| 720 | 12 | 1050 | 88 | 6270 14-- |
| | 17 | 1820 | 109 | 6272 14-- |
| | 21 | 2010 | 96 | 6271 14-- |
| | 43 | 4080 | 95 | 6273 14-- |
| 1330 | 17 | 1850 | 107 | 6274 14-- |
| | 41 | 4250 | 104 | 6276 14-- |
| | 43 | 4030 | 94 | 6275 14-- |
| | 70 | 6930 | 99 | 6277 14-- |


Lumen maintenance: L80B10 / over 72,000 h
L90B50 / 52,000 h


Coding colour temperature 3000 K:
replace 4 with 3

example 4000K: 6270 14--
3000K: 6270 13--

Coding: replace the two dashes (--) by
the corresponding figures:
example 6270 14--

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING
- 12 WITH DETECTION PRO
- 14 WITH DETECTION PRO + EXTINCTION WARNING
- 15 WITH PRO DETECTION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

 Vandal-resistant tool (bit) to be ordered separately
code : 9800 0004

 Radio remote control to be ordered separately
code : 9800 0010

Additional options TITAN C95

Coding:
add the corresponding suffix to the product code

example: 6270 1400 ----

- 9101 THROUGH WIRING
- 9413 FLAT DUROFLAM® DIFFUSER
- 9415 FLAT OPALESCENT PC DIFFUSER
- 9601 ANTI-GRAFFITI PROTECTION
- 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

DETAILS



| Aperture length R (mm) | Frame length L' (mm) | Power (W) | Luminaire light output (lm) | Luminaire efficacy (lm/W) | Code |
|---------------------------|-------------------------|-----------|--------------------------------|------------------------------|-----------|
| 730 | 760 | 12 | 1050 | 88 | 6370 14-- |
| | | 17 | 1820 | 109 | 6372 14-- |
| | | 21 | 2010 | 96 | 6371 14-- |
| | | 43 | 4080 | 95 | 6373 14-- |
| 1340 | 1370 | 17 | 1850 | 107 | 6374 14-- |
| | | 41 | 4250 | 104 | 6376 14-- |
| | | 43 | 4030 | 94 | 6375 14-- |
| | | 70 | 6930 | 99 | 6377 14-- |


Lumen maintenance: L80B10 / over 72,000 h
L90B50 / 52,000 h


Coding colour temperature 3000 K:
replace 4 with 3

example 4000K: 6370 14--
3000K: 6370 13--

Coding: replace the two dashes (--) by
the corresponding figures:
example 6370 14--

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING
- 12 WITH DETECTION PRO
- 14 WITH DETECTION PRO + EXTINCTION WARNING
- 15 WITH PRO DETECTION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

 Vandal-resistant tool (bit) to be ordered separately
code: 9800 0004

 Radio remote control to be ordered separately
code: 9800 0010

DETAILS



Painted 304L stainless steel



Brushed 316L stainless steel


| Length (mm) | Power (W) | Luminaire light output (lm) | Luminaire efficacy (lm/W) | Code |
|-------------|-----------|-----------------------------|---------------------------|-----------|
| 720 | 12 | 1050 | 88 | 6170 14-- |
| | 17 | 1820 | 109 | 6172 14-- |
| | 21 | 2010 | 96 | 6171 14-- |
| | 43 | 4080 | 95 | 6173 14-- |
| 1330 | 17 | 1850 | 107 | 6174 14-- |
| | 41 | 4250 | 104 | 6176 14-- |
| | 43 | 4030 | 94 | 6175 14-- |
| | 70 | 6930 | 99 | 6177 14-- |


Lumen maintenance: L80B10 / over 72,000 h
L90B50 / 52,000 h

Coding colour temperature 3000 K : example 4000K : 6170 14--
replace 4 with 3 3000K : 6170 13--

Coding: replace the two dashes (--) by the corresponding figures:
example 6170 14--

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING
- 12 WITH DETECTION PRO
- 14 WITH DETECTION PRO + EXTINCTION WARNING
- 15 WITH PRO DETECTION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

 Vandal-resistant tool (bit) to be ordered separately
code: 9800 0004

 Radio remote control to be ordered separately
code: 9800 0010

Additional options TITAN A30

Coding:
add the corresponding suffix to the product code

- example: 6170 1400 ----
- 9101 THROUGH WIRING
 - 9413 FLAT DUROFLAM® DIFFUSER
 - 9415 FLAT OPALESCENT PC DIFFUSER
 - 9601 ANTI-GRAFFITI PROTECTION
 - 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

DETAILS




| Length (mm) | Power (W) | Luminaire light output (lm) | Luminaire efficacy (lm / W) | Code |
|-------------|-----------|-----------------------------|-----------------------------|-----------|
| 720 | 12 | 1050 | 88 | 6070 14-- |
| | 17 | 1820 | 109 | 6072 14-- |
| | 21 | 2010 | 96 | 6071 14-- |
| | 43 | 4080 | 95 | 6073 14-- |
| 1330 | 17 | 1850 | 107 | 6074 14-- |
| | 41 | 4250 | 104 | 6076 14-- |
| | 43 | 4030 | 94 | 6075 14-- |
| | 70 | 6930 | 99 | 6077 14-- |


Lumen maintenance: L80B10 / over 72,000 h
L90B50 / 52,000 h

Coding colour temperature 3000 K : example 4000K: 6070 14--
replace 4 with 3 3000K: 6070 13--

Coding: replace the two dashes (--) by the corresponding figures:
example 6070 14--

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING
- 12 WITH DETECTION PRO
- 14 WITH DETECTION PRO + EXTINCTION WARNING
- 15 WITH PRO DETECTION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

 Vandal-resistant tool (bit) to be ordered separately
code: 9800 0004

 Radio remote control to be ordered separately
code: 9800 0010

Additional options TITAN A45

Coding:
add the corresponding suffix to the product code

- example: 6070 1400 ----
- 9101 THROUGH WIRING
 - 9413 FLAT DUROFLAM® DIFFUSER
 - 9415 FLAT OPALESCENT PC DIFFUSER
 - 9601 ANTI-GRAFFITI PROTECTION
 - 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

DETAILS





0

NOTE
GAR
SO



RONNE

RTIE ▶

