



EFFICE STAIRWAYS

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 2
- IP: 55
- IK: 10 / 20 joules
- CRI: 80
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- VK25 ceiling-mounted
- SDCM (Standard Deviation Colour Matching): 3
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 / over 72,000 hours
- Number of detector switching cycles: 1,000,000 at maximum load.
- Repairable luminaire. Spare parts available on demand
- 5-year guarantee, details of conditions available on securlite.com

Applications

- Architectural luminaire for indoor environments subject to moderate vandalism
- Installation positions: refer to installation instructions

Materials

- Recycled polycarbonate base
- Polycarbonate skirt
- Clear polycarbonate diffuser + optics
- Internal polycarbonate reflector
- Sealing gasket
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

Colours / Finish

- Standard ring colour: through-coloured white RAL9003 or traffic grey RAL7043

Wiring

- 2 × 20.5 mm Ø cable entry for cable gland
- Knockout for 1 side cable entry
- Supply terminal block: automatic, dual-entry, for 1.5 mm² conductors

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024

Fixings

- Diffuser closed using 4 × M5 stainless captive fixing screws with 2-point tamper-proof heads

Facilities available

- Stainless crosspoint screws: add the suffix **9702** to the product code – example: 201xxxxx **9702**

Tools *(to be ordered separately)*


- M5 bit for 2-point tamper-proof screws – code: **98000003**
- Bit-holder screwdriver – code: **980000005**
- Remote control (radio-control version) – code: **98000010**

Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

Dimensions

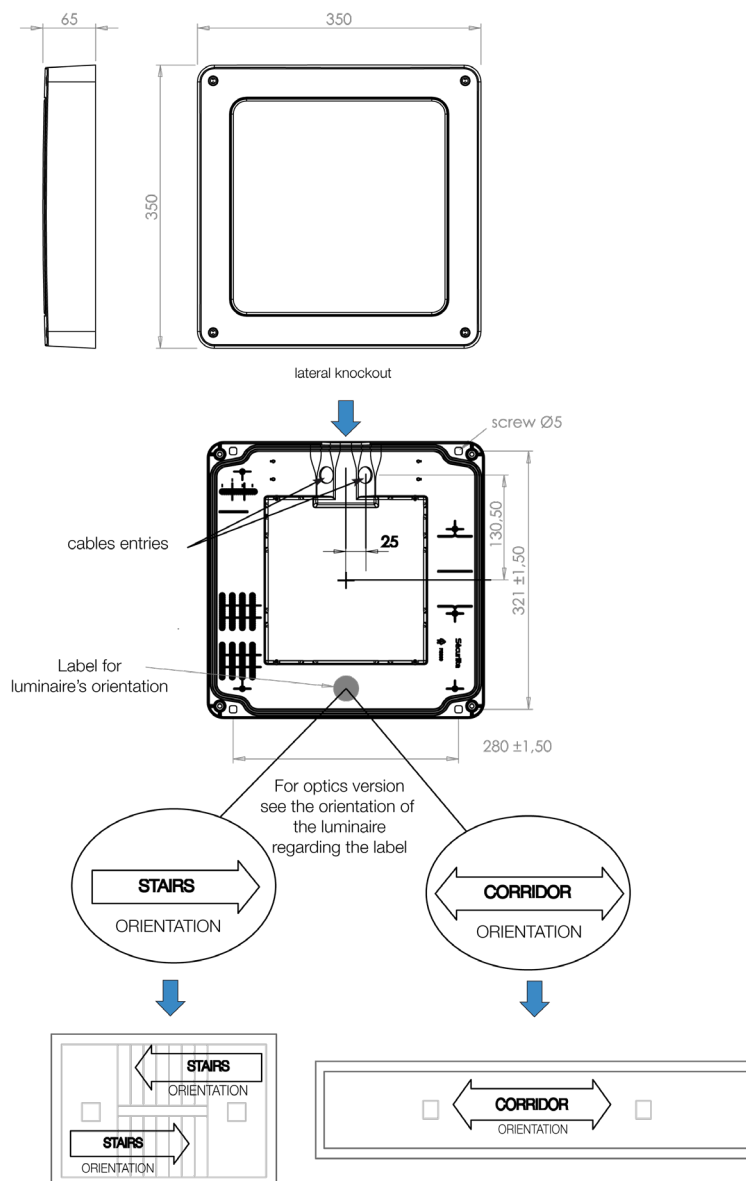

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024

Technical data and order codes

EFFICE for stairways (ceiling mounted only)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	20	-	2400	120	20120300	20121300
Effice for stairways	4000	20	-	2550	128	20120400	20121400
Effice for stairways "plus"	3000	27	-	3300	122	20130300	20131300
Effice for stairways "plus"	4000	27	-	3400	126	20130400	20131400

EFFICE for stairways (ceiling mounted only) DALI dimmable + switch dimming technical specifications and conditions of use (NOT0880): www.securlite.com (NOT0880)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	21	<0,5	2400	114	20120321	20121321
Effice for stairways	4000	21	<0,5	2550	121	20120421	20121421
Effice for stairways "plus"***	3000	28	<0,5	3300	118	20130321	20131321
Effice for stairways "plus"***	4000	28	<0,5	3400	121	20130421	20131421

EFFICE for stairways (ceiling mounted only) slave version + extinction or stand-by warning technical specifications and conditions of use for detection (NOT0435): www.securlite.com (NOT0435)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	20	<0,5	2400	120	20120303	20121303
Effice for stairways	4000	20	<0,5	2550	128	20120403	20121403
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130303	20131303
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130403	20131403

EFFICE for stairways (ceiling mounted only) + with detection technical specifications and conditions of use for detection (NOT0400): www.securlite.com (NOT0400)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	20	<0,5	2400	120	20120311	20121311
Effice for stairways	4000	20	<0,5	2550	128	20120411	20121411
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130311	20131311
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130411	20131411

EFFICE for stairways (ceiling mounted only) + with Pro detection + Extinction or standby warning technical specifications and conditions of use for detection (NOT0425): www.securlite.com (NOT0425)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	21	<0,5	2400	114	20120313	20121313
Effice for stairways	4000	21	<0,5	2550	121	20120413	20121413
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130313	20131313
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130413	20131413

EFFICE for stairways (ceiling mounted only) + with Pro detection + radio-control technical specifications and conditions of use for detection (NOT0420): www.securlite.com (NOT0420)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	21	0,5	2400	114	20120316	20121316
Effice for stairways	4000	21	0,5	2550	121	20120416	20121416
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130316	20131316
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130416	20131416

EFFICE for stairways (ceiling mounted only) + with Pro detection + extinction or standby warning + radio-control technical specifications and conditions of use for detection (NOT0430): www.securlite.com (NOT0430)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	21	0,5	2400	114	20120317	20121317
Effice for stairways	4000	21	0,5	2550	121	20120417	20121417
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130317	20121317
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130417	20121417

EFFICE for stairways (ceiling mounted only) slave version + extinction or stand-by warning + radio-control technical specifications and conditions of use for detection (NOT0440): www.securlite.com (NOT0440)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	21	<0,5	2400	114	20120307	20121307
Effice for stairways	4000	21	<0,5	2550	121	20120407	20121407
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130307	20131307
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130407	20131407

Operating instruction : www.securlite.com (NOT0500)

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024