



## DUROPARK ACCESS

### Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198-264 V AC
- Electrical protection class 1
- IP: 65
- IK: 08 / 5 joules
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- VK02 ceiling mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 5
- Photobiological hazard: RG0
- Lumen maintenance: L70B50 / 50,000 h
- 3-year guarantee, details of conditions available on [securlite.com](http://securlite.com)

### Applications

- Sealed luminaire for indoor and outdoor environments subject to moderate vandalism
- Conditions of use :
  - Models with detection: suitable for indoor and individual use
  - Installation positions: refer to installation instructions

### Materials

- Injection-moulded polycarbonate body
- Opal polycarbonate diffuser
- Sealing gaskets
- Stainless-steel fixing clips with secure closure
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

### Colours / Finish

- Paint body RAL7035

### Wiring

- 2 × 20 mm Ø threaded cable entries
- Supply terminal block for 1.5 mm<sup>2</sup> conductors, 3-pole for standard versions

*Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.*

05/01/2024

## Closing

- Diffuser: stainless-steel fixing clips with secure closure




## Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

## Dimensions

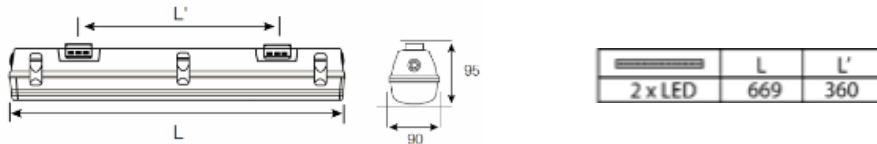



## Technical data and order codes

DUROPARK ACCESS LED									
Designation	CCT (K)	Power (W)	Power in stand by (W)	Power factor	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length L (mm)	Length L' (mm)	Code
Duropark Access LED 2 modules	4000	15	-	>0,9	2000	133	669	360	78429400
DUROPARK ACCESS LED with detection * technical specifications and conditions for detection (NOT0805) <a href="http://www.securlite.com">www.securlite.com</a> (NOT0805)									
Designation	CCT (K)	Power (W)	Power in stand by (W)	Power factor	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length L (mm)	Length L' (mm)	Code
Duropark Access LED 2 modules	4000	16	<0,5	>0,9	2000	125	669	360	78429410

## Operating instruction : [www.securlite.com](http://www.securlite.com) (NOT0740)

\* Preset detector and ready to install under standard operating conditions:

- Sensitivity 50%
- Hold time 30 s
- Light level 50 lux

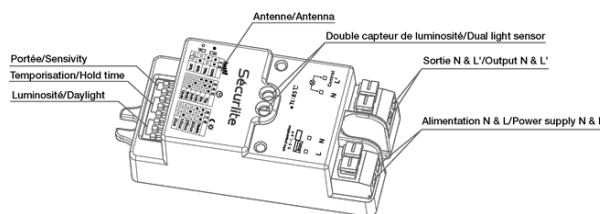

## Operating instruction : [www.securlite.com](http://www.securlite.com) (NOT0805)

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024