


# SYSTEME S



BVCert. 6037554



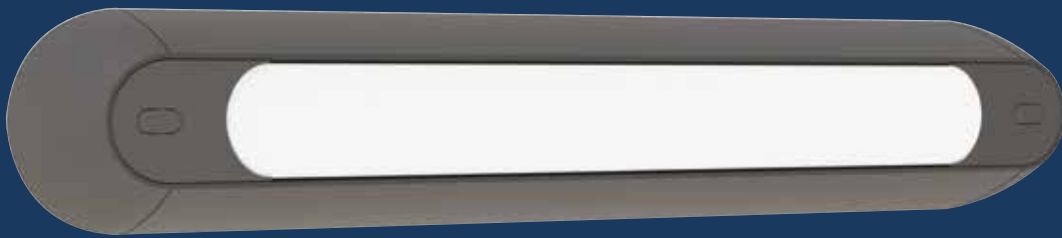

## FEATURES:


- IP65 rated waterproof luminaire with high impact resistance IK11+/80 J rated curved aluminium profile
- Opalescent or clear diffuser with louvres or with optics
- Can be suspension mounted using a mounting kit made from shiny, nickel-plated brass, with 3m stainless steel finger line supplied as standard
- Not apparent quick power connection
- Fine texture RAL 7016 anthracite grey ● finish

## OPTIONS AVAILABLE ON REQUEST:


- Motion detector adjustable via radio-control
- High UV resistance or anti-graffiti coating
- Through wiring
- Side cable entry

Optional mounting support available to order separately:  
- Suspension kit: 9854 0002


Systeo S Opalescent

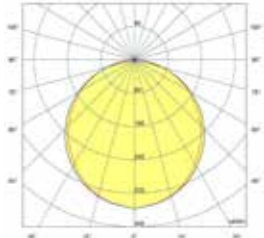


Systeo S Clear + optic 40°

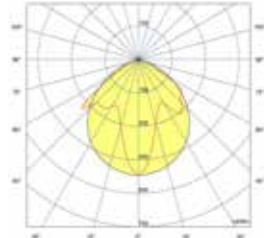


Systeo S Clear + optique 60°

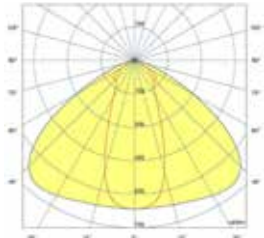



Systeo S Clear + optic 90°

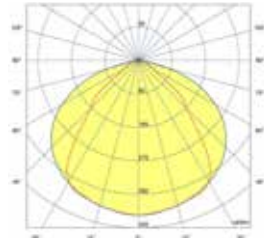

Systeo S Clear + batwing optic

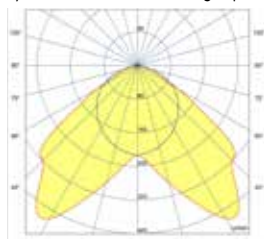

Systeo S Clear + wallwasher optic

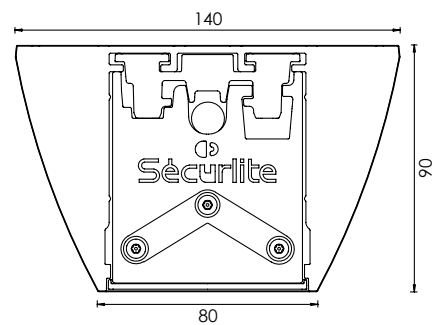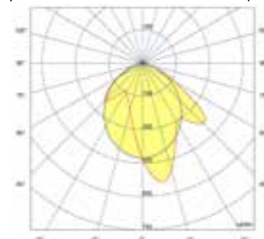

Length L (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	Opalescent surface mounted
1066	9	850	97	5608 14--
1066	14	1400	100	5602 14--
1066	26	2700	104	5603 14--
1346	19	1950	103	5604 14--
1346	37	3800	103	5605 14--

**Lumen maintenance:** L80B10 / over 72,000 h  
L90B50 / 50,000 h

**Coding colour temperature 3000 K :** example 4000K : 5602 04--  
replace 4 with 3 3000K : 5602 03--

**Coding:** replace the two dashes (--) by the corresponding figures:  
example 5602 04--

Vandal-proof tool available to order separately.  
Inset code M4: 9800 0036 + Inset code M5: 9800 0012

Radio remote control to be ordered separately  
code : 9800 0010

- 00 NO DETECTION
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 21 DALI DIMMABLE + SWITCH DIMMING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

SYSTEO S – Clear, with louvres

For ceiling-mounting versions only

Length L (mm)	Power (W)	Luminaire light output (lm) 4000 K*	Luminaire efficacy (lm / W)	Clear surface mounted
1066	11	1400	127	5636 14--
1066	16	2000	125	5637 14--
1346	16	2100	131	5638 14--
1346	26	3300	127	5639 14--

**Lumen maintenance:** L80B10 / over 72,000 h  
L90B50 / 50,000 h

**Coding colour temperature 3000 K :** example 4000K : 5636 14--  
replace 4 with 3 3000K : 5636 13--

\* Valeurs précises : se reporter à la fiche technique  
UGR à valider par étude d'écClearage.

**Coding:** replace the two dashes (--) by the corresponding figures:  
example 5636 14--

Vandal-proof tool available to order separately.  
Inset code M4: 9800 0036 + Inset code M5: 9800 0012


Radio remote control to be ordered separately  
code : 9800 0010

- 00 NO DETECTION
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 21 DALI DIMMABLE + SWITCH DIMMING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

# SYSTEO S – Clear, with optics

For ceiling mounting versions only

220-240 V AC / 50 / 60 Hz





Length L (mm)	Power (W)	Luminaire light output (lm) 4000 K*	Clear 40° optics	Clear 60° optics	Clear 90° optics	Clear batwing optics	Clear wallwasher optics
1066	9	1050	5614 14--	5619 14--	5624 14--	5629 14--	5634 14--
1066	14	1750	5611 14--	5616 14--	5621 14--	5626 14--	5631 14--
1346	19	2450	5612 14--	5617 14--	5622 14--	5627 14--	5632 14--

**Lumen maintenance:** L80B10 / over 72,000 h  
L90B50 / 50,000 h

\* For precise figures, please refer to the technical data sheet.  
UGR rating to be confirmed by a lighting study.

**Coding colour temperature 3000 K :** example 4000K : 5614 14--  
replace 4 with 3 3000K : 5614 13--

 Vandal-proof tool available to order separately.  
Inset code M4: 9800 0036 + Inset code M5: 9800 0012

 Radio remote control to be ordered separately  
code : 9800 0010

**Coding:** replace the two dashes (--) by  
the corresponding figures:  
example 5614 14--

- 00 NO DETECTION
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 21 DALI DIMMABLE + SWITCH DIMMING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

