


Specification text

PUNTO LED - FP0016

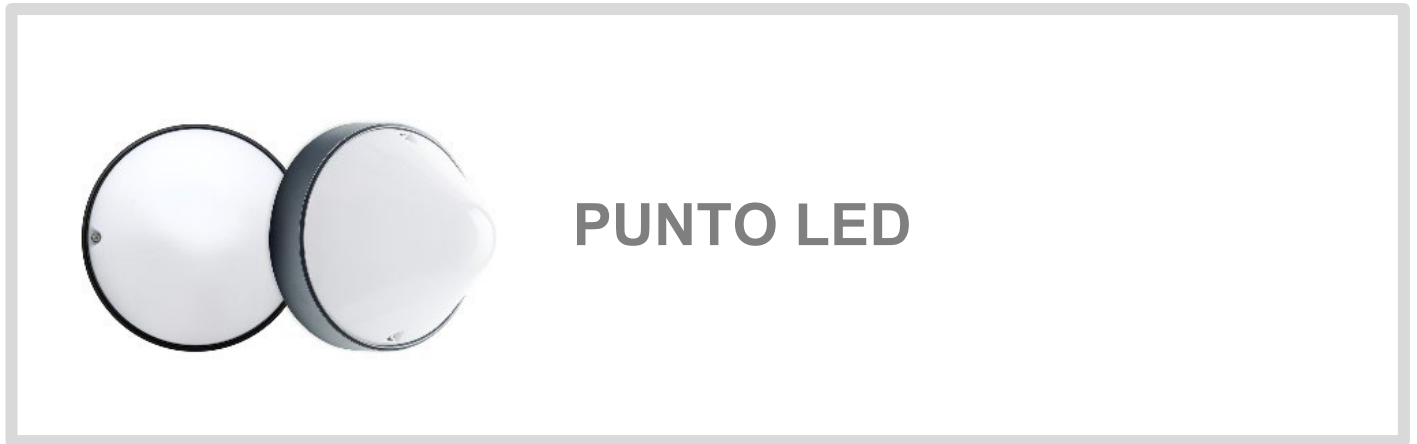

Wall or ceiling or flush mounted luminaire type PUNTO LED from SÉCURLITE or technically equivalent:

- Dimensions: Ø 330 x 250 mm
- Class I – IP66 - IK11+ / 80J – VK45 version wall – VK46 version ceiling – VK46 flush-mounting version – 850°C – CRI 80 – SDCM 3 – photobiological hazard: RG0
- Marine-grade die-cast aluminium base with chromated surface finish, available in white, black, grey
- Abrasion-resistant polyester paint finish, withstands chemical elements and pollutants
- Opalescent polycarbonate diffuser with 3 captive vandal-resistant stainless steel screws
- Anti-rip-out-skirt, 4 internal fixing points
- 2 knockout cable entry Ø 20,5 mm conductors
- *CCT, power, luminaire output and efficacy: refer to the technical data sheet according to product code*
- Options available on request: with detection, DALI dimmable, with Pro detection + extinction or standby warning, with Pro detection + radio control, with Pro detection + extinction or standby warning + radio control, slave version + extinction or standby warning, slave version + extinction or standby warning + radio control.
Refer to the technical data sheet according to product code
- Range available in 3000 K or 4000 K
- Lumen maintenance: L80B10 / 72,000 hr – 5-year warranty
- Labelled range Origine France Garantie
- Repairable luminaire



*Technical and dimensional data are given for information only and may be modified at any time without notice.
Please enquire before ordering.*