


Specification text

VOILA DURABLE ASYMMETRIC - FP0051

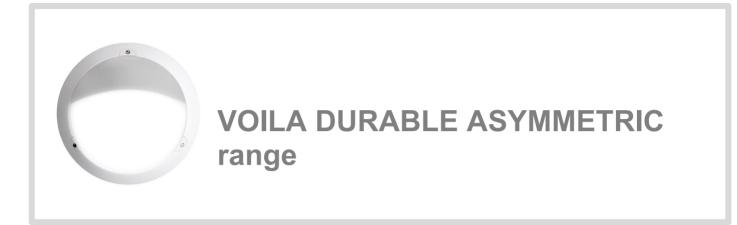

Wall mounted luminaire type VOILA DURABLE ASYMMETRIC from SÉCURLITE or technically equivalent:

- Dimensions: Ø 340 x 105 mm
- Class II IP65 IK10 / 20J VK26 850°C CRI 80 SDCM 3 photobiological hazard: RG0
- · Recycled polycarbonate base available in white, black, grey
- Opalescent polycarbonate diffuser with 3 captive vandal-resistant stainless steel screws
- Anti-rip-out-skirt, 4 internal fixing points
- Side and rear cable entries for plastic conduit for renovation supply terminal block: automatic dual-entry for 1.5 mm² conductors
- CCT, power, luminaire output and efficacy: refer to the technical data sheet according to product code
- Options available on request: with detection, with Pro detection + extinction or standby warning, with Pro
 detection + radio control, with Pro detection + extinction or standby + radio control. Refer to the technical
 data sheet according to product code
- Range available in 3000 and 4000 K
- · You can set 2 different light outputs by using a switch on the driver
- Lumen maintenance: L80B10 / 100,000 hr 8-year warranty
- Number of detector switching cycles: 1,000 000 at maximum load
- EPD available for ON/OFF version: https://register.pep-ecopassport.org
- EPD available for controllable version: https://register.pep-ecopassport.org
- Labelled range Origine France Garantie
- Repairable luminaire. Spare parts available on demand.

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering