



VOILA START

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 2
- IP: 55, with silicone gasket
- IK: 10 / 20 joules
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C to NF EN 60598-1 standard
- Anti-rip-out skirt, 4 internal fixing points
- VK25 wall-mounted, VK25 ceiling-mounted

Applications

- Architectural luminaire for indoor and outdoor environments subject to moderate vandalism
- Conditions of use:
 - Models with detection: suitable for indoor use
 - Installation positions: refer to installation instructions

Materials

- Base: recycled polycarbonate
- Diffuser: reeded clear polycarbonate
- RoHS: the products contain no prohibited substances as defined in the European Directive 2002/95/CE and amendments

Colours / Finish

- Standard base colours: white RAL9003, black RAL9005, grey RAL7035
- Screw covers: white RAL9003, black RAL9005, grey RAL7035

Wiring

- 1 × 20,5 mm Ø cable entry + 1 knockout × 20,5 mm Ø cable entry for cable gland
- Supply terminal block: automatic dual-entry for 1.5 mm² conductors
- Side cable entries for plastic conduit for renovation

Fixings

- Standard versions use M5 stainless cross-point diffuser fixing screws (VK24)
- Vandal-resistant versions use M5 stainless 2-point tamper-proof diffuser fixing screws
- Captive diffuser screws

Facilities available

- Stainless crosspoint screws: add the suffix **9702** to the product code – example: 1000 0000 **9702**

Accessories

(to be ordered separately)


- M5 bit for 2-point tamper-proof screws – code: **9800 0003**
- Bit-holder screwdriver – code: **98000 0005**

Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

Dimensions

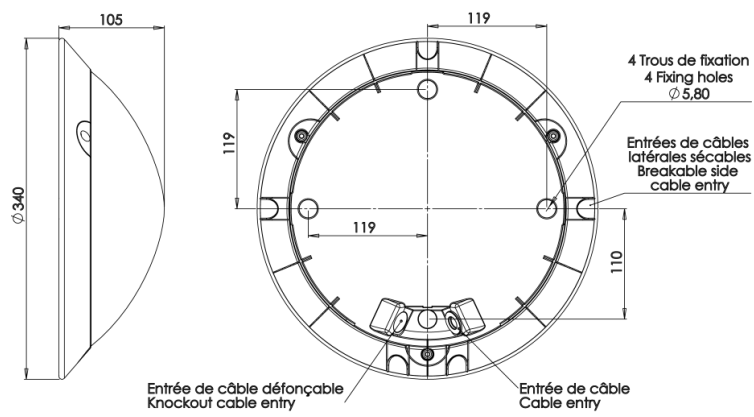

VOILA START										
Designation	Base	CCT (K)	Lamp power (W)	Luminaire power (W)	Luminaire efficiency (%)	Source output (lm)	Source luminous efficiency (lm/W)	White	Grey	Black
Max.60W halo. 23W CFLi E27 S/L	E27	-	-	-	78,1	-	-	10000000	10003000	10002000
1x18W TC-DE B.E.	G24q-2	4000	18	21	69,1	1200	66,7	10030400	10033400	10032400
1x26W TC-DE B.E.	G24q-3	4000	26	29	58,4	1800	69,2	10050400	10053400	10052400
1x32W TC-TE B.E.	GX24q-3	4000	32	36	73,6	2400	75	10060400	10063400	10062400
LED A60 / 827	E27	2700	8	8	73,3	806	100,8	10010300	10013300	10012300

VOILA START DALI dimmable + switch dimming + standby warning										
Designation	Base	CCT (K)	Lamp power (W)	Luminaire power (W)	Luminaire efficiency (%)	Source output (lm)	Source luminous efficiency (lm/W)	White	Grey	Black
1x18W TC-DE B.E.	G24q-2	4000	18	22	49	1200	66,7	10030421	10033421	10032421
1x26W TC-DE B.E.	G24q-3	4000	26	30	49	1800	69,2	10050421	10053421	10052421
1x32W TC-TE B.E.	GX24q-3	4000	32	37	61,2	2400	75	10060421	10063421	10062421

VOILA START + slave version + extinction warning										
Designation	Base	CCT (K)	Lamp power (W)	Luminaire power (W)	Luminaire efficiency (%)	Source output (lm)	Source luminous efficiency (lm/W)	White	Grey	Black
1x18W TC-DE B.E.	G24q-2	4000	18	22	49	1200	66,7	10030404	10033404	10032404
1x26W TC-DE B.E.	G24q-3	4000	26	30	49	1800	69,2	10050404	10053404	10052404
1x32W TC-TE B.E.	GX24q-3	4000	32	37	61,2	2400	75	10060404	10063404	10062404

VOILA START + slave version + stand-by warning										
Designation	Base	CCT (K)	Lamp power (W)	Luminaire power (W)	Luminaire efficiency (%)	Source output (lm)	Source luminous efficiency (lm/W)	White	Grey	Black
1x18W TC-DE B.E.	G24q-2	4000	18	22	49	1200	66,7	10030405	10033405	10032405
1x26W TC-DE B.E.	G24q-3	4000	26	30	49	1800	69,2	10050405	10053405	10052405
1x32W TC-TE B.E.	GX24q-3	4000	32	37	61,2	2400	75	10060405	10063405	10062405

VOILA START with detection – technical specifications and conditions for detection (NOT0400) : www.securlite.com (NOT0400)										
Designation	Base	CCT (K)	Lamp power (W)	Luminaire power (W)	Luminaire efficiency (%)	Source output (lm)	Source luminous efficiency (lm/W)	White	Grey	Black
Max.60W halo. 23W CFLi E27 S/	E27	-	-	-	78,1	-	-	10000011	10003011	10002011
1x18W TC-DE B.E	G24q-2	4000	18	22	69,1	1200	66,7	10030411	10033411	10032411
1x26W TC-DE B.E	G24q-3	4000	26	30	58,4	1800	69,2	10050411	10053411	10052411
1x32W TC-TE B.E.	GX24q-3	4000	32	37	73,6	2400	75	10060411	10063411	10062411
LED A60 / 827	E27	2700	8	9	73,3	806	61,1	10010311	10013311	10012311

VOILA START with Pro detection + standby warning – technical specifications and conditions for detection (NOT0405) : www.securlite.com (NOT0405)										
Designation	Base	CCT (K)	Lamp power (W)	Luminaire power (W)	Luminaire efficiency (%)	Source output (lm)	Source luminous efficiency (lm/W)	White	Grey	Black
1x18W TC-DE B.E.	G24q-2	4000	18	22	49	1200	66,7	10030415	10033415	10032415
1x26W TC-DE B.E.	G24q-3	4000	26	30	49	1800	69,2	10050415	10053415	10052415
1x32W TC-TE B.E.	GX24q-3	4000	32	37	61,2	2400	75	10060415	10063415	10062415

VOILA START with Pro detection + extinction warning – technical specifications and conditions for detection (NOT0405) : www.securlite.com (NOT0405)										
Designation	Base	CCT (K)	Lamp power (W)	Luminaire power (W)	Luminaire efficiency (%)	Source output (lm)	Source luminous efficiency (lm/W)	White	Grey	Black
1x18W TC-DE B.E.	G24q-2	4000	18	22	49	1200	66,7	10030414	10033414	10032414
1x26W TC-DE B.E.	G24q-3	4000	26	30	49	1800	69,2	10050414	10053414	10052414
1x32W TC-TE B.E.	GX24q-3	4000	32	37	61,2	2400	75	10060414	10063414	10062414

VOILA START with Pro detection + radio-control technical specifications and conditions for detection (NOT0415) : www.securlite.com (NOT0415)										
Designation	Base	CCT (K)	Lamp power (W)	Luminaire power (W)	Luminaire efficiency (%)	Source output (lm)	Source luminous efficiency (lm/W)	White	Grey	Black
1x18W TC-DE B.E.	G24q-2	4000	18	22	49	1200	66,7	10030416	10033416	10032416
1x26W TC-DE B.E.	G24q-3	4000	26	30	49	1800	69,2	10050416	10053416	10052416
1x32W TC-TE B.E.	GX24q-3	4000	32	37	61,2	2400	75	10060416	10063416	10062416