



## RONDINO

### Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 1
- IP: 66
- IK: 11++ / 120 joules
- Incandescent wire test 850° / 30 s
- Electronic ballast
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- Anti-rip-out skirt, 4 internal fixing points
- VK55 surface mounted, VK56 ceiling mounted, VK56 flush mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 3
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 / 72,000 hours
- Number of detector switching cycles: 1,000,000 at maximum load.
- Repairable luminaire. Spare parts available on demand
- 5-year guarantee, details of conditions available on [securlite.com](http://securlite.com)

### Applications

- Decorative luminaire for indoor, outdoor, subject to moderate and severe vandalism
- Conditions of use:
  - Models with detection: suitable for indoor use
  - Installation positions: refer to installation instructions

### Materials

- Marine-grade die-cast aluminium base
- Diffuser: opal polycarbonate
- Flush-mounting surround (option): steel treated by electrophoresis, paint finish to match base
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

### Colours / Finish

- Colour: matt black RAL 9005, white aluminium RAL 9006, matt white RAL 9016
- Abrasion-resistant polyester paint finish, withstands chemical elements and pollutants

### Wiring

- Supply terminal block: automatic, dual-entry, for 1.5 mm<sup>2</sup> conductors
- 2 × 20.5 mm Ø cable entry cable entry for cable gland
- Diffuser: retained by 3 × M5 stainless 2-point tamper-proof screws with sealing washers
- Gear tray: fastened by 2 captive stainless cross-point screws

*Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.*

### Facilities available

- Standard screws (VK54): add the suffix **9702** to the product code – example: 25xxxxxx **9702**
- Flush-mounting version: add the suffix **9802** to the product code – example: 25xxxxxx **9802**

### Accessories *(to be ordered separately)*

- AKI grille kit – black RAL9005 – code: **98250001**
- AKI grille kit – grey RAL9006 – code: **98250002**
- AKI grille kit – white RAL9016S – code: **98250003**
  
- AKITA grille kit – black RAL9005 – code: **98250004**
- AKITA grille kit – grey RAL9006 – code: **98250005**
- AKITA grille kit – white RAL9016S – code: **98250006**
  
- RUEDA grille kit – black RAL9005 – code: **98250007**
- RUEDA grille kit – grey RAL9006 – code: **98250008**
- RUEDA grille kit – white RAL9016S – code: **98250009**

### Tools *(to be ordered separately)*


- M5 bit for 2-point tamper-proof screws – code: **98000003**
- Remote control (radio-control version) – code: **98000010**
- Bit-holder screwdriver – code: **98000005**

### Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1 / 2-2)
- Incandescent Wire Test certificate (depending on product)

### Dimensions

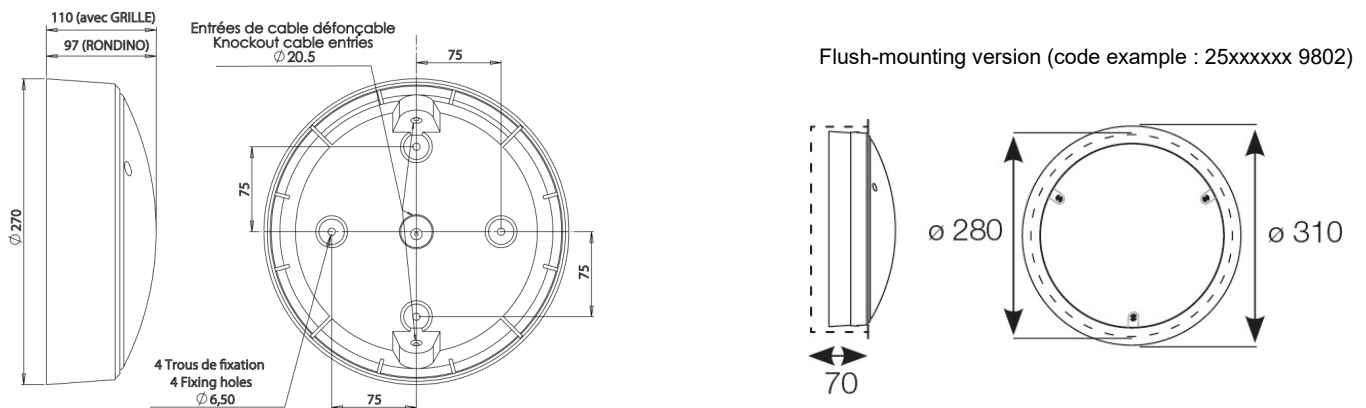

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

## Technical data and order codes

RONDINO LED								
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
Rondino 1200	3000	8,9	-	850	96	25610300	25611300	25612300
Rondino 1200	4000	8,9	-	900	101	25610400	25611400	25612400
Rondino 2000	3000	13	-	1400	108	25600300	25601300	25602300
Rondino 2000	4000	13	-	1450	112	25600400	25601400	25602400
Rondino 3000	3000	20	-	2000	100	25620300	25621300	25622300
Rondino 3000	4000	20	-	2100	105	25620400	25621400	25622400

RONDINO LED with Pro detection technical specifications and conditions for detection (NOT0410): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0410)								
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
Rondino 1200	3000	9,7	<0,5	850	88	25610312	25611312	25612312
Rondino 1200	4000	9,7	<0,5	900	93	25610412	25611412	25612412
Rondino 2000	3000	14	<0,5	1400	100	25600312	25601312	25602312
Rondino 2000	4000	14	<0,5	1450	104	25600412	25601412	25602412
Rondino 3000	3000	21	<0,5	2000	95	25620312	25621312	25622312
Rondino 3000	4000	21	<0,5	2100	100	25620412	25621412	25622412

RONDINO LED with Pro detection + Extinction or standby warning technical specifications and conditions for detection (NOT0425): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0425)								
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
Rondino 1200	3000	9,7	<0,5	850	88	25610313	25611313	25612313
Rondino 1200	4000	9,7	<0,5	900	93	25610413	25611413	25612413
Rondino 2000	3000	14	<0,5	1400	100	25600313	25601313	25602313
Rondino 2000	4000	14	<0,5	1450	104	25600413	25601413	25602413
Rondino 3000	3000	21	<0,5	2000	95	25620313	25621313	25622313
Rondino 3000	4000	21	<0,5	2100	100	25620413	25621413	25622413

RONDINO LED slave version + extinction or stand-by warning technical specifications and conditions for detection (NOT0435): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0435)								
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
Rondino 1200	3000	9,7	<0,5	850	88	25610303	25611303	25612303
Rondino 1200	4000	9,7	<0,5	900	93	25610403	25611403	25612403
Rondino 2000	3000	14	<0,5	1400	100	25600303	25601303	25602303
Rondino 2000	4000	14	<0,5	1450	104	25600403	25601403	25602403
Rondino 3000	3000	21	<0,5	2000	95	25620303	25621303	25622303
Rondino 3000	4000	21	<0,5	2100	100	25620403	25621403	25622403

RONDINO LED with Pro detection + radio-control technical specifications and conditions for detection (NOT0420): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0420)								
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
Rondino 1200	3000	9,7	0,5	850	88	25610316	25611316	25612316
Rondino 1200	4000	9,7	0,5	900	93	25610416	25611416	25612416
Rondino 2000	3000	14	0,5	1400	100	25600316	25601316	25602316
Rondino 2000	4000	14	0,5	1450	104	25600416	25601416	25602416
Rondino 3000	3000	21	<0,5	2000	95	25620316	25621316	25622316
Rondino 3000	4000	21	<0,5	2100	100	25620416	25621416	25622416

RONDINO LED With Pro detection + extinction or standby warning + radio-control technical specifications and conditions for detection (NOT0430): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0430)								
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
Rondino 1200	3000	9,7	0,5	850	88	25610317	25611317	25612317
Rondino 1200	4000	9,7	0,5	900	93	25610417	25611417	25612417
Rondino 2000	3000	14	0,5	1400	100	25600317	25601317	25602317
Rondino 2000	4000	14	0,5	1450	104	25600417	25601417	25602417
Rondino 3000	3000	21	<0,5	2000	95	25620317	25621317	25622317
Rondino 3000	4000	21	<0,5	2100	100	25620417	25621417	25622417

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024

## Technical data and order codes

RONDINO LED slave version + extinction or stand-by warning + radio-control technical specifications and conditions for detection (NOT0440): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0440)								
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
Rondino 1200	3000	9,7	0,5	850	88	25610307	25611307	25612307
Rondino 1200	4000	9,7	0,5	900	93	25610407	25611407	25612407
Rondino 2000	3000	14	0,5	1400	100	25600307	25601307	25602307
Rondino 2000	4000	14	0,5	1450	104	25600407	25601407	25602407
Rondino 3000	3000	21	<0,5	2000	95	25620307	25621307	25622307
Rondino 3000	4000	21	<0,5	2100	100	25620407	25621407	25622407

RONDINO LED + DALI dimmable + switch dimming								
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
Rondino 1200	3000	9,7	-	850	88	25610321	25611321	25612321
Rondino 1200	4000	9,7	-	900	93	25610421	25611421	25612421
Rondino 2000	3000	14	-	1400	100	25600321	25601321	25602321
Rondino 2000	4000	14	-	1450	104	25600421	25601421	25602421
Rondino 3000	3000	20	-	2000	100	25620321	25621321	25622321
Rondino 3000	4000	20	-	2100	105	25620421	25621421	25622421

Operating instruction : [www.securlite.com](http://www.securlite.com) (NOT0525<sup>2</sup>)