


LUMIPARK



(Fast power connection)

Features

- Input voltage : 220-240V AC, 50/60 Hz
- Input voltage range : 198-264 V AC
- Electrical protection class : 2
- IP : 66 / 69K
- IK : 10 / 20 joules
- Incandescent wire test 850° / 30 s
- Rated ambient operating temperature : 25° C
- Operating temperature range : -20 °C ... +35 °C
- VK 22 (wall)
- IRC : 80
- SDCM : 3
- Photobiological hazard : RG0
- Energy class C light source
- Lumen maintenance : L80B10 / >72 000 h
- Lumen maintenance : L90B50 / 40 000 h
- Number of detector switching cycles (option 11) : 1,000,000 at maximum load.
- Repairable luminaire. Spare parts available on demand
- 3-year guarantee, details of conditions available on securlite.com

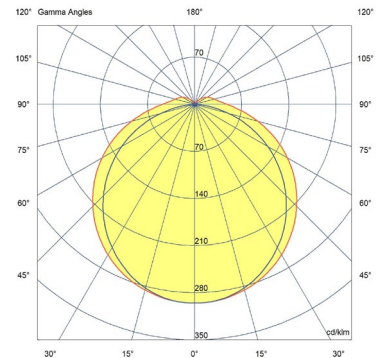

Applications

- Architectural luminaire for indoor and outdoor environments subject to moderate vandalism
- Conditions of use :
 - Installation positions : refer to installation instructions
 - Version with detection : not recommended for outdoor use

Material

- Body in extruded polycarbonate with UV protection
 - End caps in injected polycarbonate with UV protection
 - Fibreglass-reinforced polyamide handles
 - Plug-in terminal block
 - Elastomer seal
- RoHS : the products do not contain any prohibited substances as defined in European Directive 2011/65/EU and its amendments

Colours / Finish

- Standard colours: Grey

Wiring

- - Power supply terminal block: connector for wire cross-section :
 - 1,5 mm² (cables 3G1.5mm² or 5G1.5mm²)
 - 2.5mm² (cables 3G2.5mm²)
- 1 entry via IP68 ISO M20 cable gland at one end for cable Ø 7 mm to 13 mm maximum
- Fast power connection

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

Screws

- Locked by two stainless steel Torx security screws (T10)

Tools *(to be ordered separately)*


- Head insert Torx + Pin (screw M3 – T10) - code : **98000041**
- Screwdriver insert holder – code : **98000005**
- Remote control for radio controlled version – code : **98000010**

Approvals

Certificates available :

- CE certificate (as per EN60598-1 / 2-1 / 2-3)
- Incandescent wire test certificate

Dimensions

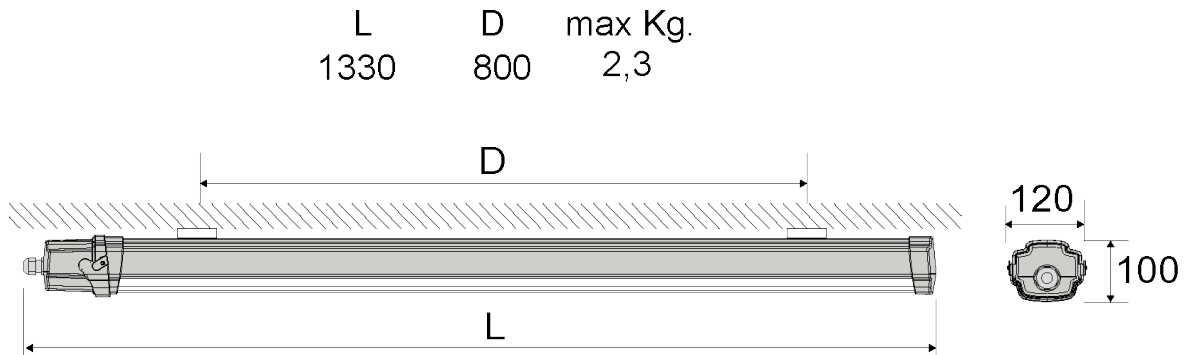

Technical data sheet

LUMIPARK – FT0348

Technical data and order codes

| LUMIPARK | | | | | | |
|----------|-----------|----------------------|--------------|-----------------------|---------------------------|-----------------|
| CCT (K) | Power (W) | Power in standby (W) | Power factor | Luminaire output (lm) | Luminaire efficacy (lm/W) | Reference |
| 4000 | 35 | - | 0,93 | 4200 | 120 | 78439400 |
| 4000 | 47 | - | 0,97 | 5650 | 120 | 78449400 |

| LUMIPARK – with detection (non-chainable) Technical specifications and conditions of use for detection : www.securlite.com (NOT0805) | | | | | | |
|--|-----------|----------------------|--------------|-----------------------|---------------------------|-----------------|
| CCT (K) | Power (W) | Power in standby (W) | Power factor | Luminaire output (lm) | Luminaire efficacy (lm/W) | Reference |
| 4000 | 49 | 0,45 | 0,93 | 5650 | 115 | 78449410 |

| LUMIPARK – with detection 350VA max Technical specifications and conditions of use for detection : www.securlite.com (NOT0400) | | | | | | |
|--|-----------|----------------------|--------------|-----------------------|---------------------------|-----------------|
| CCT (K) | Power (W) | Power in standby (W) | Power factor | Luminaire output (lm) | Luminaire efficacy (lm/W) | Reference |
| 4000 | 36 | 0,44 | 0,93 | 4200 | 117 | 78439411 |
| 4000 | 48 | 0,44 | 0,97 | 5650 | 118 | 78449411 |

| LUMIPARK – with Pro detection 700VA max + radio-control Technical specifications and conditions of use for detection : www.securlite.com (NOT0420) | | | | | | |
|--|-----------|----------------------|--------------|-----------------------|---------------------------|-----------------|
| CCT (K) | Power (W) | Power in standby (W) | Power factor | Luminaire output (lm) | Luminaire efficacy (lm/W) | Reference |
| 4000 | 36 | 0,44 | 0,93 | 4200 | 117 | 78439416 |
| 4000 | 48 | 0,44 | 0,97 | 5650 | 118 | 78449416 |

| LUMIPARK - DALI dimmable + switch dimming Technical specifications and conditions of use for detection : www.securlite.com (NOT0880) | | | | | | |
|--|-----------|----------------------|--------------|-----------------------|---------------------------|-----------------|
| CCT (K) | Power (W) | Power in standby (W) | Power factor | Luminaire output (lm) | Luminaire efficacy (lm/W) | Reference |
| 4000 | 35 | 0,14 | 0,96 | 4200 | 120 | 78439421 |
| 4000 | 47 | 0,28 | 0,96 | 5650 | 120 | 78449421 |

Operating instruction : www.securlite.com (NOT0895)