



DUROPARK ACCESS

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198-264 V AC
- Electrical protection class 1
- IP: 65
- IK: 08 / 5 joules
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- VK02 ceiling mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 5
- Photobiological hazard: RG0
- Lumen maintenance: L70B50 / 50,000 h
- 3-year guarantee, details of conditions available on securlite.com

Applications

- Sealed luminaire for indoor and outdoor environments subject to moderate vandalism
- Conditions of use :
 - Models with detection: suitable for indoor and individual use
 - Installation positions: refer to installation instructions

Materials

- Injection-moulded polycarbonate body
- Opal polycarbonate diffuser
- Sealing gaskets
- Stainless-steel fixing clips with secure closure
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

Colours / Finish

- Paint body RAL7035

Wiring

- 2 × 20 mm Ø threaded cable entries
- Supply terminal block for 1.5 mm² conductors, 3-pole for standard versions

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024

Closing

- Diffuser: stainless-steel fixing clips with secure closure




Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

Dimensions

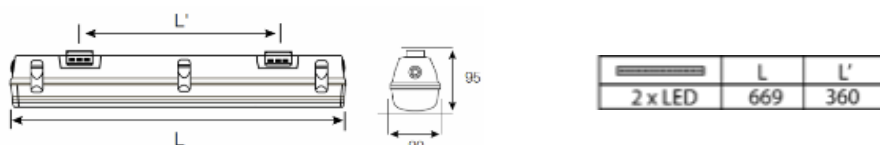

Technical data and order codes



DUOPARK ACCESS LED									
Designation	CCT (K)	Power (W)	Power in stand by (W)	Power factor	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length L (mm)	Length L' (mm)	Code
Duopark Access LED 2 modules	4000	15	-	>0,9	2000	133	669	360	78429400

DUOPARK ACCESS LED with detection * technical specifications and conditions for detection (NOT0805) www.securlite.com (NOT0805)									
Designation	CCT (K)	Power (W)	Power in stand by (W)	Power factor	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length L (mm)	Length L' (mm)	Code
Duopark Access LED 2 modules	4000	16	<0,5	>0,9	2000	125	669	360	78429410

Operating instruction : www.securlite.com (NOT0740)

* Preset detector and ready to install under standard operating conditions:

- Sensitivity 50%
- Hold time 30 s
- Light level 50 lux

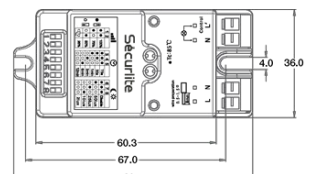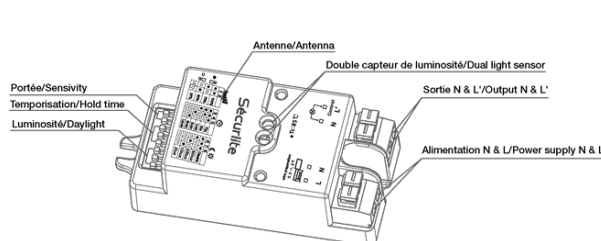

Operating instruction : www.securlite.com (NOT0805)

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024

Securlite – Z.I. des Ajeux – 72 400 La Ferté-Bernard – France – Phone: +33 2 43 60 40 00 – Fax: +33 2 43 60 40 09 – www.securlite.com