

BANG ACCESS

An original luminaire ideally suited
to environments subject to vandalism,
thanks to its exceptional impact resistance, up
to 50 joules IK11.



BVCert. 6037554






FEATURES:

- Low-consumption vandal-resistant architectural luminaire
- Increased strength IK11 50J
- Reinforced polyamide base
- Opalescent polycarbonate diffuser (for LED version)
- Frosted clear polycarbonate diffuser (E27 versions)
- CCT 4000 K, CRI min. 80
- Stainless steel vandal-resistant tamper-proof screws
- Decorative polycarbonate washers
- Opalescent
- RAL 9003 ○
- RAL 9006 ○
- RAL 9005 ●


OPTIONS AVAILABLE ON REQUEST:

- 3000 K LEDs
- Standby LED
- Other RAL colours


Bang Round Access
code: 1565 0400

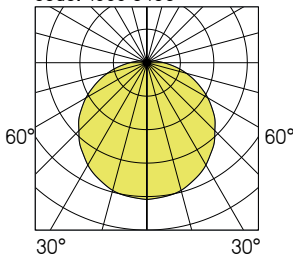


Bang Round Access

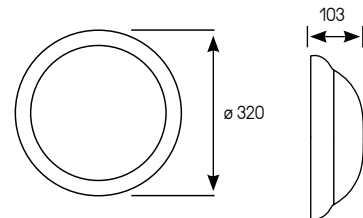


Bang Square Access
code: 1665 0400




Bang Square Access

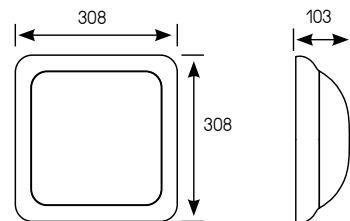

Bang Rectangle Access
code: 1691 0400

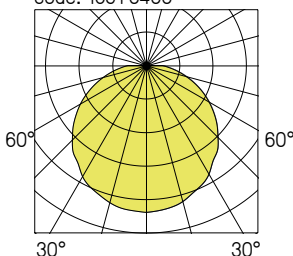

Bang Rectangle Access

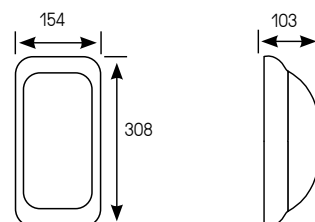

LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	Opalescent
LED 1200	10	1050	105	1565 04--
LED 2000	14	1600	114	1566 04--
LED 2750	19	2300	121	1567 04--

Lumen maintenance: L70B10 / 56,000 h

- Vandal-resistant tool (bit) to be ordered separately
code : 9800 0003
- Radio remote control to be ordered separately
code : 9800 0010

Coding: replace the two dashes (--) by the corresponding figures:
example 1565 04--
 -- 00 NO DETECTION
 10 WITH DETECTION

LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	Opalescent
LED 1200	9	1050	118	1691 04--

Lumen maintenance: L70B10 / 56,000 h

- Vandal-resistant tool (bit) to be ordered separately
code : 9800 0003
- Radio remote control to be ordered separately
code : 9800 0010

Coding colour temperature 3000 K: example 4000K : 1691 04--
replace 4 with 3
3000K : 1691 03--

Coding: replace the two dashes (--) by the corresponding figures:
example 1691 04--
 -- 00 NO DETECTION
 10 WITH DETECTION

LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	Opalescent
LED 1200	10	1050	105	1665 04--
LED 2000	14	1600	114	1666 04--
LED 2750	19	2300	121	1667 04--

Lumen maintenance: L70B10 / 56,000 h

- Vandal-resistant tool (bit) to be ordered separately
code : 9800 0003
- Radio remote control to be ordered separately
code : 9800 0010

Coding: replace the two dashes (--) by the corresponding figures:
example 1665 04--
 -- 00 NO DETECTION
 10 WITH DETECTION



31

